


BT Series

Rotary Valve for Metering and Airlock Applications

The BT Series valves ensure optimal bulk density and throughput of hard-to-convey material; a return-side vent vents leaked air, maximizing air flow through the rotor, improving material flow.

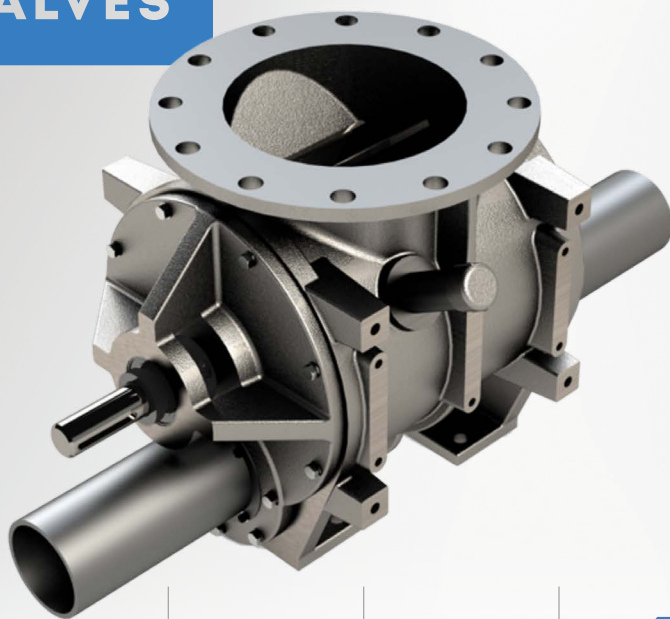

SECTOR INDUSTRIES:



Plastics



Pet Food



Construction



Food



Pharmaceutical
and Cosmetics



Chemical

FEATURES

- 12-vane rotary valve and return-side vent port design significantly reduce air leakage and ensure optimal bulk density and material feed efficiency of hard-to-convey materials.
- Steep-angled inlet flange aids material infeed; improves material flow performance.
- Available in 2 heights, 16.14"H and 18.50"H; and 2 flange diameters, 8" to 10".
- Valve housing cast in North America; ensures superior strength and solidification of housing's metallurgy.

- CNC-machined components and housing provide precision tolerances; eliminates axial shaft movement, extends maintenance cycles.
- Outboard bearing design protects bearings in high-temperature and high-PSIG applications; removes bearings from direct path of damaging contaminants.
- Easily manages pressure differentials up to 20 PSIG.
- Excellent performance in high-temperature applications up to 500°F.

SPECIFICATIONS:

INLET/OUTLET
FLANGE SIZES:

2 sizes, 8" and 10"

MATERIAL OF
CONSTRUCTION:

Cast Iron,
Stainless Steel

PRESSURE
DIFFERENTIAL:

Up to 20 PSIG

HIGH TEMPERATURE
RANGE:

500°F

BT Series

Rotary Valve for Metering
and Airlock Applications



ACS
VALVES

OPTIONS

- | |
|---|
| • 304 or 316 cast stainless steel valve housing. |
| • No. 4 finish on all rotor surfaces. |
| • Interior coating: hard chrome. |
| • Adjustable rotor tips. |
| • Custom drive packages. |
| • Application-specific accessories: motion speed switch assembly. |